

Prodigy™ S7-19PQ Logic System

The Prodigy™ S7-19PQ Logic System delivers an efficient and high-performance solution for early firmware/software developmentand system validation. The S7-19PQ is a compact and all-in-one system that includes all components - FPGA modules, power control module, and power supply - for maximum flexibility, durability and portability. The S7-19PQ is based on Xilinx's Virtex UltraScale + VU19P FPGA and provides 4,736 general purpose I/Os and 176 high-speed transceivers on 40 high performance connectors.

The Prodigy™ S7-19PQ Logic System is part of the S2C Prodigy Complete Prototyping Solutions, which consists of industry-leadingdesign partition, debug solutions and remote capabilities that ensures users FPGA-based prototype comes up quickly. Users also have access to a rich portfolio of Prototype Ready IP in the form of plug-play daughter cards to quickly build prototyping targets.

Highlights

- · Delivers up to 196M equivalent ASIC gates
- 5,288 high-performance I/Os for peripheral expansions & multi-system connectivity
- · 176 high-speed transceivers at 16Gbps
- 8 on-board DDR4 SODIMMs at up to 2,400Mbps totaling 128GB
- Compatible with over 90 Prototype Ready IPs
- Feature-rich remote management and runtime controls



Features

Large Capacity & Scalability

- 35.76M System Logic Cells and 663.6Mb of internal memory
- 15,360 DSP Slice
- Eight on-board DDR4 SO-DIMM sockets can hold up to 72-bit 16GB DDR4 in each socket
- Multiple Logic Systems can be conveniently connected together to expand capacity

High Performance

- Demanding length matched and impedance controlled
- Up to 200W of power for each FPGA
- On-board support of DDR4 memory can run up to 2,400 Mbps
- 176 high-speed transceivers can run up to 16Gbps

High Reliability

- Screw-lock design to high-speed I/O connectors
- Self-Tests Isolate design issues from board issues conveniently with a software GUI
- Monitoring of on-board voltage, current, and temperature with a software GUI
- Automatic shut-down upon detection of over-current, over-voltage, or over-temperatures

Flexible & Powerful I/Os

- 4,608 I/O pins and 112 high-speed transceivers through 32 Prodigy connectors
- 64 high-speed transceivers and 128 GPIOs through 8 PGT I/O connectors
- I/O voltage can be adjusted between 1.2V ~ 1.8V through runtime software in GUI

© 2021 S2C Limited. All Rights Reserved. S2C, Prototype Ready, ProtoBridge, Logic Matrix and Prodigy, are trademarks of S2C Limited. All other tradenames and trademarks are the property of their respective owners.

www.s2ceda.com CB210817



Features

Advanced Clock Management Standalone Mode

- 8 global clocks to be selected from
 - o 8 programmable clock sources (0.16 ~ 350MHz)
 - o 5 pairs of external clocks through MMCX connectors
 - o 1 OSC socket
- 3 design clock outputs through 3 pairs of MMCX connectors
- · 3 global resets to be selected from
 - o 3 from on-board push buttons
 - o 2 from Clock Module Type D
 - o 2 from runtime software in GUI


Multi-System Mode

- 8 global clocks to be selected from
 - 8 local programmable clock sources (0.16 ~ 350MHz)
 - o 8 global clock sources
- 3 feedback clocks can be output to global clock sources
- 2 global resets sourced from global reset sources

Ease-of-Use

- Multiple FPGA configuration options through Ethernet port, USB port, JTAG, and micro SD card
- Remote power on/off/recycle through Ethernet
- Auto detection of daughter cards and cables
- Virtual SWs & LEDs for simple tasks such as changing a setting or indicating a condition remotely
- Virtual UART for firmware debugging
- User Test Area LEDs, Push Buttons, Switches, and Pin Headers for testing and debugging
- On-board battery charging circuit makes FPGA bin file encryption easy (battery not included)
- Optional ProtoBridge[™] AXI software to co-model with software/simulation models at transaction-level
- Optional Prodigy Multi-Debug Module (MDM) for the concurrent deep trace debugging of multiple FPGAs
- Compatible with S2C's off-the-shelf pre-tested daughter cards

I/O Architecture

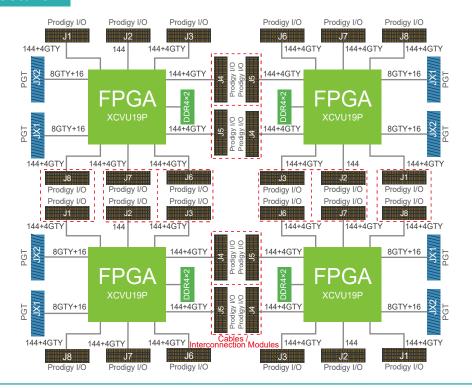

© 2021 S2C Limited. All Rights Reserved. S2C, Prototype Ready, ProtoBridge, Logic Matrix and Prodigy, are trademarks of S2C Limited. All other tradenames and trademarks are the property of their respective owners.

www.s2ceda.com CB210817